

# Deep Learning for Classification of Sleep EEG Data

International Journal of Immunology and Scientific Research

Research Article

Mengyao Liu<sup>1</sup>, Shenglan Chu<sup>1</sup>, Lintao Yue<sup>1</sup>, Jinming Cao<sup>2</sup> and Bin Zhao<sup>1\*</sup>

<sup>1</sup>School of Science, Hubei University of Technology, Wuhan, Hubei, China.

<sup>2</sup>School of Information and Mathematics, Yangtze University, Jingzhou, Hubei, China.

**\*Correspondence author**

**Bin Zhao**

School of Science  
Hubei University of Technology  
Wuhan  
Hubei  
China

Submitted : 30 Oct 2020 ; Published : 15 Nov 2020

## Abstract

Sleep is an important part of the body's recuperation and energy accumulation, and the quality of sleep also has a significant impact on people's physical and mental state during the epidemic of Coronavirus Disease. It has attracted increasing attention on how to improve the quality of sleep and reduce the impact of sleep-related diseases on health.

### The electroencephalogram

(EEG) signals collected during sleep belong to spontaneous EEG signals. Spontaneous sleep EEG signals can reflect the body's changes, which is also an basis for diagnosis and treatment of related diseases.

Therefore, the establishment of an effective model for classifying sleep EEG signals is an important auxiliary tool for evaluating sleep quality, diagnosing and treating sleep-related diseases.

In this paper, outliers of each kind of original data were detected and deleted by using the principle of 3 Sigma and k-means clustering + Euclidean distance detection method. Then, using the Adam algorithm with adaptive learning rate constructs the Softmax multi-classification BP neural network the model, and relatively high accuracy and AUC values were finally obtained.

**Keywords :** Sleep EEG, Deep learning, Softmax function, Adam algorithm, Multiple classification problem

## Introduction


The sleep process is a complex process of dynamic changes. According to R&K, the international standard for the interpretation of sleep stages, there are different states during sleep.

In addition to the awake period, the sleep cycle consists of two alternate sleep states, namely rapid eye movement(REM), and non-REM.

In non-REM, according to the gradual change of sleep state from shallow to deep, it is further divided into sleep, I, II, III, and sleep IV. Sleep stage III and sleep stage IV can be combined with a deep sleep stage.

Figure 1 shows the time series of EEG signals corresponding to different sleep stages, from top to bottom, namely, wakefulness, sleep I, sleep II, deep sleep and REM.

Figure 1 shows the characteristics of EEG signals vary in different sleep stages during the epidemic of Coronavirus Disease.

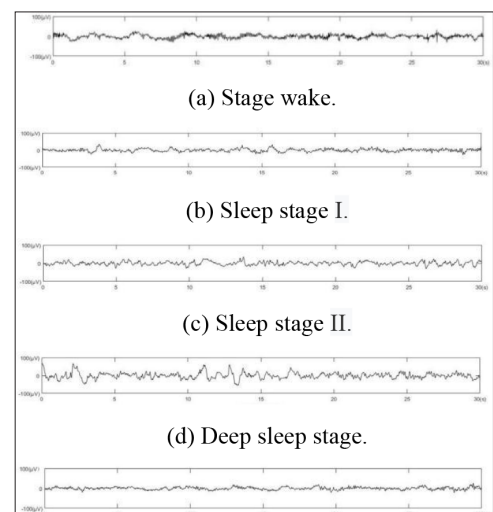

**Figure 1:** The sequence of sleep EEG signals in sleep stages.

Automatic staging based on EEG signals can reduce the artificial burden on expert physicians and it is a useful auxiliary tool for assessing sleep quality diagnosing and treating sleep-related diseases. In this paper, Python is used to build a neural network, and design a sleep staging prediction model. Based on a few training samples as possible, rit can obtain relatively high prediction accuracy.

### Overview of BP Neural Network

Artificial neural network is widely used in some aspects, including pattern recognition, function approximation, data compression, data classification, data prediction, etc [1-6]. BP neural network is an important algorithm in ANN. Figure 2 shows the basic structure of the BP neural network.

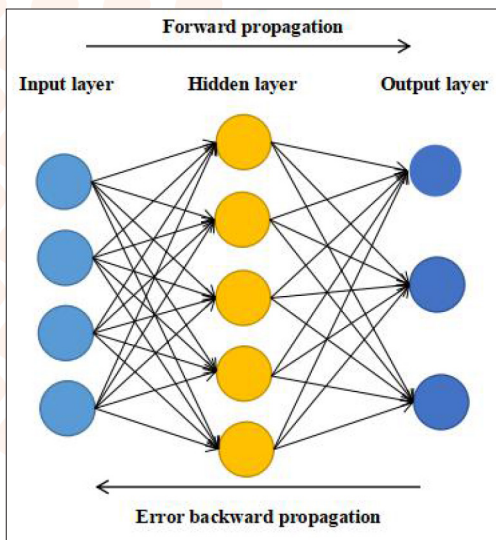


Figure 2: Basic structure diagram of BP neural network.

Introduction to activation function and algorithm:

ReLU function :

$$\text{ReLU} = \max(0, x)$$

Softmax function :

$$S_i = \frac{e^i}{\sum_j e^j}$$

Figure 3 shows the operating principle.

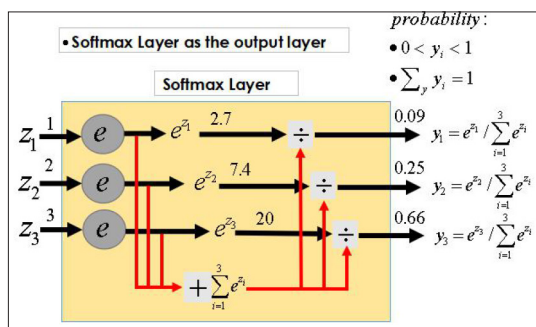


Figure 3: Principle of Softmax function

Adam algorithm:

$m_{0,v_0,t} \leftarrow 0$  Initialize 1<sup>st</sup> 2<sup>nd</sup> moment vector and timestep do while:

$t \leftarrow t + 1$

$g_t \leftarrow \nabla_{\theta} f(\theta_{t-1})$  Computing the gradient

$m_t \leftarrow \beta_1 \cdot m_{t-1} + (1 - \beta_1) \cdot g_t$  Update biased first moment estimate

$v_t \leftarrow \beta_2 \cdot v_{t-1} + (1 - \beta_2) \cdot g_t^2$  Update biased second moment estimate

$\hat{m}_t \leftarrow \frac{m_t}{(1 - (\beta_1)^t)}$  Compute bias - corrected first moment estimate

$\hat{v}_t \leftarrow \frac{v_t}{(1 - (\beta_2)^t)}$  Compute bias - corrected second raw moment estimate

$\theta_t \leftarrow \theta_{t-1} - \alpha \cdot \frac{\hat{m}_t}{\sqrt{\hat{v}_t} + \epsilon}$  Update parameters

Where  $\alpha$  is the step length,  $\beta_1, \beta_2 \in [0, 1]$  Formula is the moment estimation of the exponential decay rate, and  $f(\theta)$  is the random objective function of the parameter  $\theta$ .

In this paper, the whole training process of the improved BP neural network model is:

**Step 1:** Parameter initialization. Determine the node number of the network input layer, hidden layer, and output layer, and initialize the weight, the bias between each layer, then initialize the learning rate.

**Step 2:** Calculate the output of the hidden layer. The hidden layer output is calculated by the weight and bias between the input vector and the connection layer and the ReLU activation function.

**Step 3:** Calculate the output of the output layer. The predicted output is calculated through the hidden layer output and connection weights and bias and the Softmax activation function.

**Step 4:** Calculate Softmax cross-entropy as cost function according to predicted output and real label.

**Step 5:** Backpropagation and the adaptive learning rate Adam algorithm is used to update the weight and bias [7].

**Step 6:** Determine whether the cost reaches the error range or the number of iterations. If not, return step 2.

### Data Description and Preprocessing

Data were collected from 3000 sleep EEG samples and their labels taken from different healthy adults during overnight sleep. The first is a “known label”, which represents the different sleep stages in digital form: stage wake (6), rapid eye movement (5), sleep I (4), sleep II (3), and deep sleep (2); The second to fifth columns are the characteristic parameters calculated from the original time sequence, successively including “Alpha”, “Beta”, “Theta” and “Delta”, which correspond to the energy proportion of EEG signals in the frequency range of “8-13Hz”, “14-25Hz”, “4-7Hz” and “0.5-4Hz” respectively. The unit of characteristic parameters is the percentage.

This paper gives raw data stage wake (6), and REM. (5), sleep I (4), sleep II (3), deep sleep (2), four brain electrical signal energy proportion of five sleep stages of brain electrical signal energy proportion, but the original data are generally given there are some abnormal data outliers or missing value, therefore we to each index of the five sets of data make a boxplot graph, the result is as follows in figure 4.

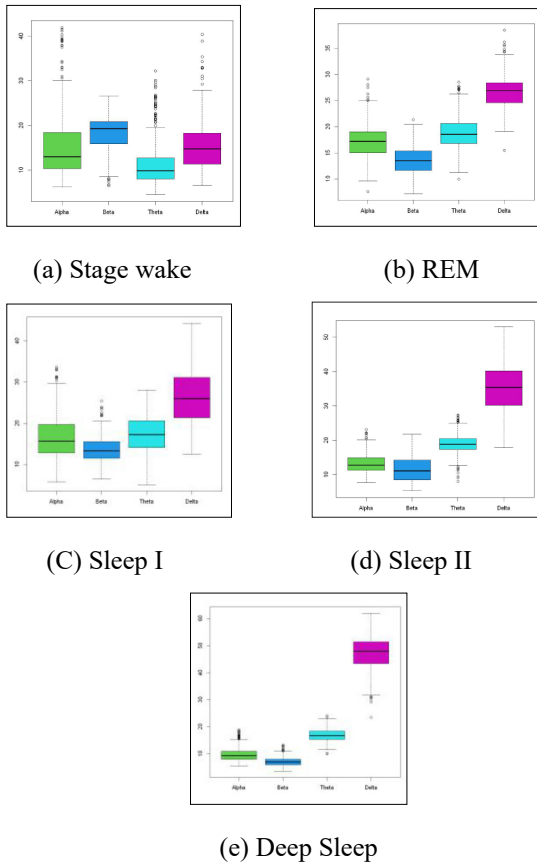


Figure 4: Boxplot of each sleeping period.

Five sleep period by Figure 4 shows, there are some outliers, namely, these all belong to the original data of abnormal points, this paper uses the principle of 3 sigmas will each table of abnormal data deletion, then after the processing of five tables to merge, and then using the K-means clustering + Euclidean distance outlier test, to find and remove outliers, as shown in figure 5, a total of 2883 samples after pretreatment [8,9].

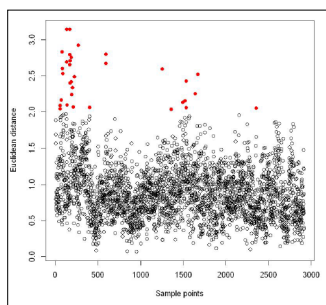


Figure 5: Diagram of outliers.

### Model Training and Prediction


We divided the data into a training set and test set in a ratio of

2:8. We trained and tested the data using the traditional decision tree model (DT) and support vector machine model (SVM), and compared the classification effect with the accuracy rate and AUC value as evaluation indexes [10]. The results are as follows:


Classifier	Accuracy rate
DT	0.59
SVM	0.68
Adam-BPNNet	0.73

Table 1: Comparison table of several classification accuracy rates


As can be seen from Table 1, the accuracy of Adam-BPNNet in several traditional methods is relatively high. The ROC curve of each classification method is shown in Figure 6.

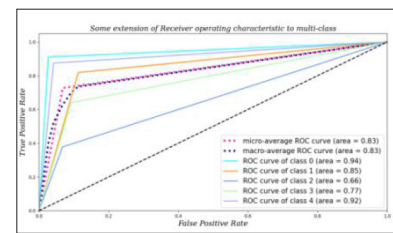


(a) Two layer BPNNet-ROC

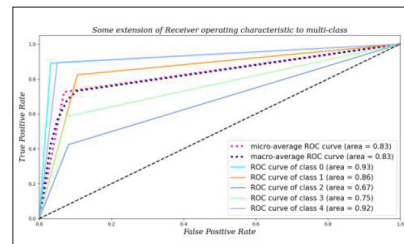

(b) Three layer BPNNet-ROC

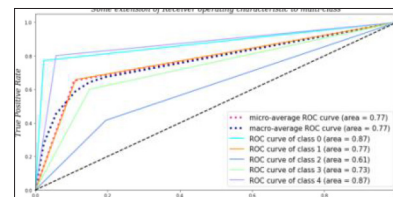

(c) DT-ROC

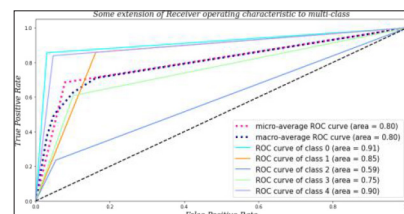

(d) SVM-ROC

Figure 6: ROC curve of each classification method.

Classifier	AUC
DT	0.77
SVM	0.80
Adam-BPNNet	0.83

**Table 2:** Comparison table of AUC values of different classification models.

Table 2 shows that in the Adam-BPNNet model, fewer training sets will still have a better classification effect.

The prediction result is the best classification effect obtained after many experiments. In the early stage of the experiment, the classification accuracy is low. After repeated debugging of the number of hidden layers and nodes, the best AUC value of this experiment is 0.83.

### Conclusion

This study is mainly based on theoretical research and combines theory with practice. BP neural network based on an adaptive learning rate Adam algorithm is used for data classification. Also, Softmax is selected as the activation function in the output layer, which enables the model to have good self-learning and self-adaptive ability. The most important thing is that the network has good generalization ability. When designing the classifier, it should consider whether the network can correctly classify the objects it needs to classify and whether the network can correctly classify the unseen or noise-polluted patterns after training. The classification AUC value of this study is 0.83, which is scientific to a certain extent and can be used as an effective auxiliary tool for the evaluation of sleep quality, diagnosis, and treatment of sleep-related diseases.

### Acknowledgement

This work was supported by the Philosophical and Social Sciences Research Project of Hubei Education Department (19Y049), and the Staring Research Foundation for the Ph.D. of Hubei University of Technology (BSQD2019054), Hubei Province, China.

### References

1. Yun Qi (2018) Experimental Study on NDVI Inversion Using GPS-R Remote Sensing Based on BP Neural Network [D]. Xuzhou: China University of Mining and Technology.
2. Jiao Wang (2016) Study of Data Acquisition System for Electric Stair-Climbing Wheelchair Seat Position Regulating Mechanism [D]. Tianjin: Hebei University of Technology.
3. Yongfeng Cao, Yanjun Zhao (2017) Research on Computer Intelligent Image Recognition technology based on GA-BP Neural Network [J]. *Applied Laser* 37: 139-143.
4. Faezeh Rasi Marzabadi, Mehran Masdari, Mohammad Reza Soltani (2020) Application of Artificial Neural Network in Aerodynamic Coefficient Prediction of Subducted Airfoil

[J]. *Journal of Research in Science and Engineering* 2: 13-17.

5. Xiaomin Wang, Rong Chen, Bin Qiao (2020) Application of BP Neural Network in Tea Disease Classification and Recognition [J]. *Guizhou Science* 38: 93-96.
6. Reza Behmanesh, Iman Rahimi (2020) The Optimized Regression Neural Network Combined with Experimental Design and Regression for Control Chart Prediction [J] 2: 8-12.
7. Kingma DP, Ba J. Adam (2015) A Method for Stochastic Optimization [C]. 3rd International Conference for Learning Representations. San Diego.
8. Lin Lou (2018) Design and Implementation of Anomaly Detection System of Web User Behaviors [D]. Zhejiang University.
9. Hua Jiang, Feng Ji, Huijiao Wang, Xin Wang, Yidi Luo (2018) Improved K-means Algorithm for Ocean Data Anomaly Detection [J]. *Computer Engineering and Design* 39: 3132-3136.
10. Hang Li (2012) *Statistical Learning Methods* (in Chinese). Beijing: Tsinghua University Press.

**Copyright:** ©2020 Bin Zhao. This is an open-access article distributed under the terms of the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original author and source are credited.